


## Hammond Diecast Alum. Flanged Base Boxes-1590F

Rugged, diecast aluminium alloy . Tough yet easy to machine. Meets IP54.

- Lap joint construction provides protection against dust & splashing water, and improved EMI / RFI shielding.
- Painted version is painted with tough polyester powder paint for lasting finish.
- Assembled with 6-32 x 1/2" machine screws into tapped holes, nickel plated on black to match the finish.
- Bottom flange is an aluminium plate welded onto the base of the enclosure.
- Lid screws are exposed for easy access. If you require higher security see the flanged lid versions.
- Watertight versions are available — see 1590WF type

For detailed drawings and CAD files visit [www.hammondmfg.com](http://www.hammondmfg.com)

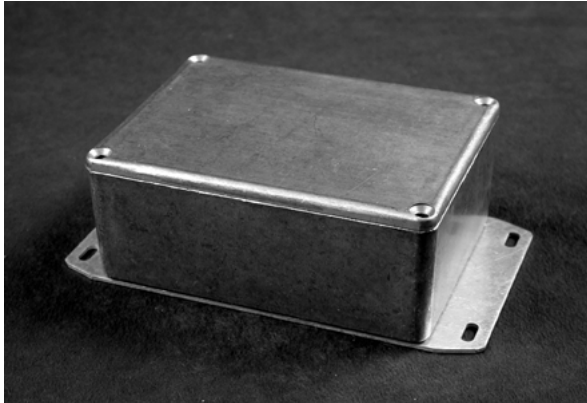

### Standard Version

External Dimensions not including flange

Part Number		Length	Width	Height (no lid)	Height With Lid
Unpainted	Black				
26-1590LLBF	26-1590LLBFBK	50	50	21	25
26-1590LBF	26-1590LBFBK	51	51	27	31
26-1590HF	26-1590HFBK	53	38	27	31
26-1590YF	26-1590YFBK	92	92	38	42
26-1590AF	26-1590AFBK	93	39	27	31
26-1590GF	26-1590GFBK	100	50	21	25
26-1590SF	26-1590SFBK	111	82	40	44
26-1590BF	26-1590BFBK	112	60	27	31
26-1590BBF	26-1590BBFBK	119	94	30	34
26-1590QF	26-1590QFBK	120	120	28	32
26-1590UF	26-1590UFBK	120	120	55	59
26-1590VF	26-1590VFBK	120	120	90	94
26-1590CF	26-1590CFBK	120	94	53	56.5
26-1590TF	26-1590TFBK	121	80	55	59
26-1590N1F	26-1590N1FBK	121.1	66	35.3	39.3
26-1590KKF	26-1590KKFBK	125	125	53	57
26-1590KF	26-1590KFBK	125	125	75	79
26-1590JF	26-1590JFBK	145	95	45	49
26-1590P1F	26-1590P1FBK	153	82	46	50
26-1590DDF	26-1590DDFBK	188	119.5	33	37
26-1590DF	26-1590DFBK	188	120	52	56
26-1590EF	26-1590EFBK	188	120	78	82
26-1590FF	26-1590FFBK	188	188	63	67
26-1590R1F	26-1590R1FBK	192	111	57	61