


## Cable Glands - Standard Type

Nylon fingers give even pressure on gland for good seal • Two piece gland insert permits wide range of cable diameters

PG Thread  
Pitch 1.5mm

Part Number	Hole Diameter D1	D2	B1	B2	B3	L1	L2	L3	Cable Dia. Range
23-PGA16	16	11.0	4.8	6.5	10	12	17	16.0	5-10
23-PGA20	20	14.1	5.1	10.5	12.5	13	19	19.0	6-13
23-PGA25	25	18.5	8.5	9.5	14	13	22	22.0	10-18

Material: UL Approved Black Nylon 6/6

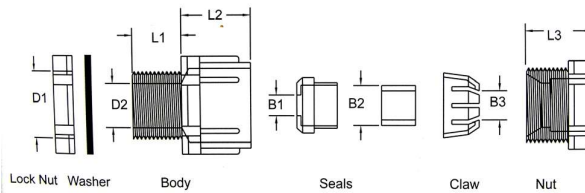


## Cable Glands - Strain Relief Type

Support for cable in portable situations

PG Thread  
Pitch 1.5mm

Part Number	Hole Diameter D1	D2	B2	B3	L1	L2	L3	Cable Dia. Range
23-PGA16SR	16	11.0	6.5	10	12	17	62	5-10
23-PGA20SR	20	14.1	10.5	12.5	13	19	78	6-13

Material: UL Approved Black Nylon 6/6

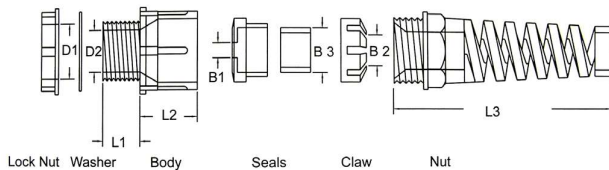

## Right Angle Cable Gland

One piece body/claw speeds up assembly

Part Number	Hole Diameter D1	NPT Thread	D2	B1	L1	L2	L3	L	H	Cable Dia. Range mm
23-NPTA16	16.6	3/8"	12	10.5	11.7	9.9	16.7	48.5	30.0	5 - 9
23-NPTA21	21.0	1/2"	14	14.0	14.7	11.8	18.4	51.6	31.2	10 - 13
23-NPTA26	26.3	3/4"	19.2	18.4	14.8	12.6	22.3	64.5	41.6	13 - 16
23-NPTA42	41.7	1 1/4"	31.6	33.0	18.8	16.3	31.0	85.0	53.0	22 - 29

