

Fast Connection - Screwless Spring Type


Low profile - DT144R Series - Pitch 3.81mm, 3.96mm, 5.0mm & 7.5m

Insert and release wires with a screwdriver


Terminals and solid wires can be inserted directly without the assistance of the lever.

Part Number	Poles	Pitch mm	Max Current	Max mm ²
32-DT144R-xxP	2 to 24	5.0	10A	2.5
32-DT144R-xxP1	2 to 24	3.81	10A	1.5
32-DT144R-xxP2	2 to 24	3.96	10A	1.5
32-DT144R-xxP3	2 to 24	7.5	10A	2.5


Where xx is the number of poles

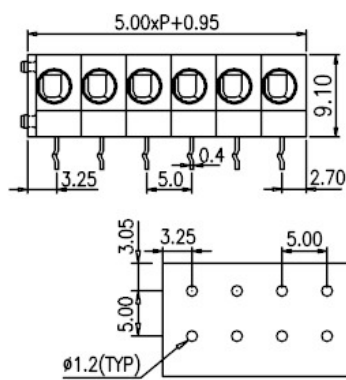


32-DT144R-06P

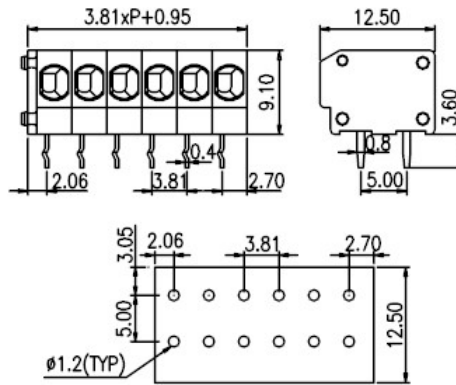


32-DT144R-06P1

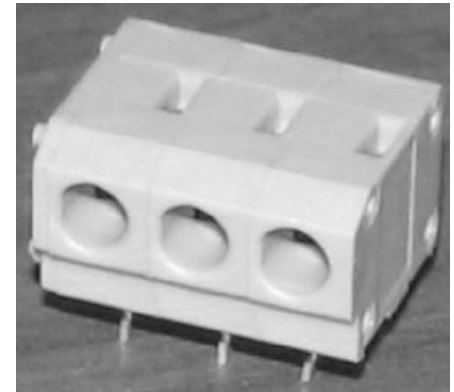

32-DT144R-03P

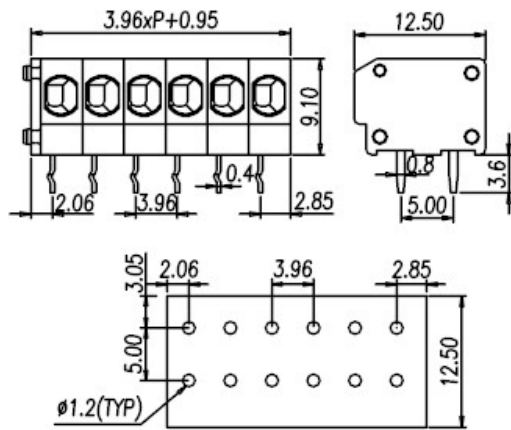

32-DT144R-06P2

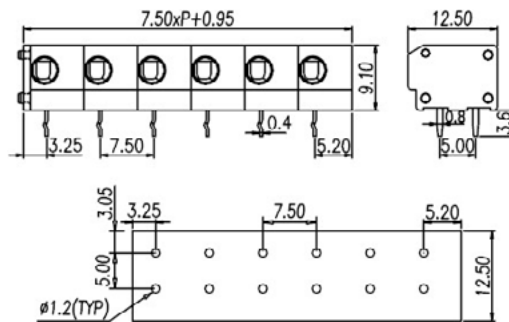

32-DT144R-06P3